
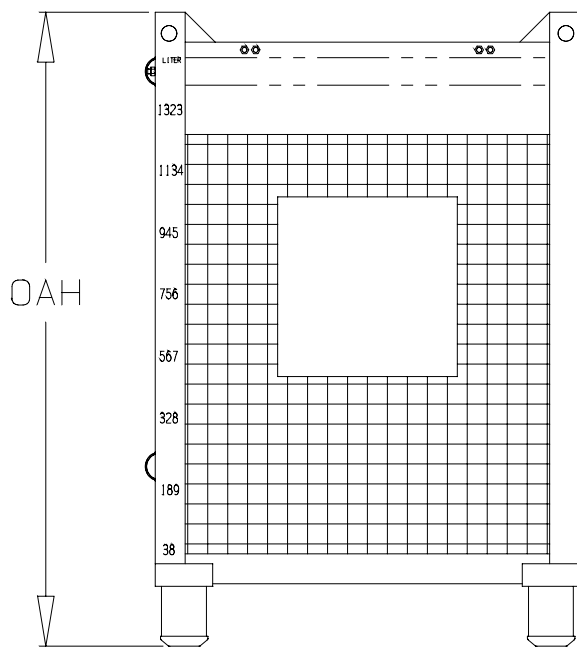


STD 2IN DISCHARGE VALVE  
STD 6IN CAP

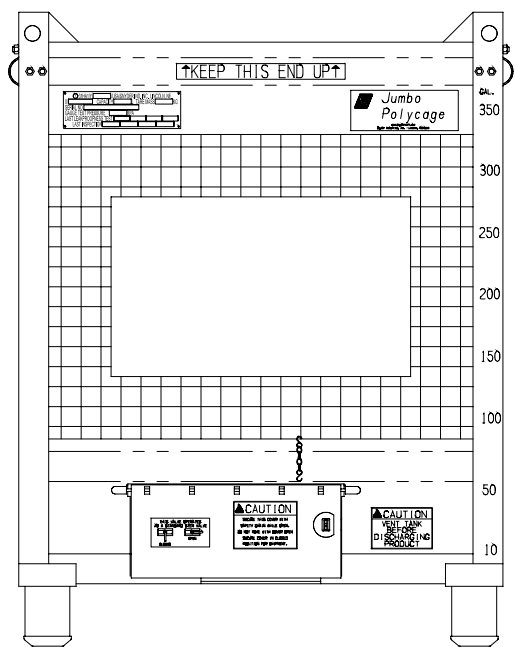

Jumbo Polycage IBC

Sii P/N	Capacity	OAH
19114	180 Gal	45
19115	250 Gal	50
19117	350 Gal	63
19118	400 Gal	72
19119	550 Gal	86

This tank has been tested and certified to meet D.O.T. requirements per 49 C.F.R., Part 178, Subpart N and Subpart O for metal intermediate bulk containers for liquids intended for the transportation of hazardous materials. (Identification code 31A1 Y)

Meets Packing Group II and Group III tests for liquids up to 1.9 specific gravity.

See 49 C.F.R. Part 172.101 Hazardous Materials Table for packaging authorizations.

The 180, 250, 290, 350, and 400 gallon Jumbo Polycage IBCs are all tested and rated for 1.9 Specific Gravity products.

The 550 gallon Jumbo Polycage IBC is tested and rated for 1.4 Specific Gravity product.

Notes:

1. Tank is designed and constructed in accordance with U.N. Specifications
2. Tank is air tested @ 3 PSI
3. All welds cleaned of slag and spatter
4. Frame is painted Trans Blue
5. Lid to be installed
6. 2IN bung to be installed 1/8-1/6 rotation beyond solid gasket contact (Ref: 30 lb-ft)

© Copyright Snyder Industries, Inc. 2008

**SNYDER INDUSTRIES, INC.**  
LINCOLN, NE 68504 PHONE: (402) 467-5221 FAX: (402) 467-3247

(All dimensions in inches.)

JUMBO POLYCAGE 42X48 COMPOSITE IBC

Standard Jumbo Polycage IBC  
42" X 48"

**SNYDER INDUSTRIES, INC.**